

HIGH-SPEED, HIGH-PRODUCTIVITY TAPPING CENTER

# T 4000

T 4000/HP/HS/L/LHS/LHP



# T 4000

DN Solutions's T series high-speed tapping centers deliver excellent cutting performance and help customers significantly improve their productivity. T series machines have good sized working envelopes, fast rapid rates on their X-,Y- and Z-axes and, depending on the model, different spindle options - all designed to meet customers' needs and requirements. The machines are reliable and can take light to heavy duty cutting their stride. For larger parts the T4000L, with 700mm X-axis stroke is available. From the T 4000HP (high-productivity) model with its ultra-fast rapids, through to the T 4000HS (high-speed) model with its 24000 r/min spindle capable of reliable performance over extended periods ... there is a T Series machine that meets your drilling and tapping needs perfectly.

## CONTENTS

Product Overview	Basic Information	Detailed Information	Customer Support Service
	<b>04</b> Basic Structure	<b>11</b> FANUC i PLUS	<b>19</b> Customer Support and Services
	<b>05</b> Machining Area & Feed Axis	<b>12</b> Power   Torque	<b>19</b> Global Network
	<b>06</b> Spindle	<b>13</b> External Dimensions	
	<b>07</b> Magazine	<b>17</b> Table	
	<b>08</b> Productivity Performance	<b>18</b> Machine Specifications	
	<b>09</b> Standard   Optional Specifications		
	<b>10</b> Peripheral Equipment		



**HIGH RELIABILITY  
FAST PROCESSING**



- The servo-driven T series machines, equipped with 21 tools and servo-driven ATC as standard, deliver improved process reliability and, due to spindle length optimization, improved acceleration and deceleration too.

**HIGH-SPEED,  
HIGH-PRODUCTIVITY  
TAPPING CENTER**



- The T series machine tool line up comprises high-speed and highproductivity models with different spindle options. Additional process security and guaranteed precision is available via a smart technology spindle thermal compensation system provided as standard.

**ENHANCED STABILITY  
AND USER  
CONVENIENCE**



- User convenience has been improved by reducing the height of the machine and the worktable and by optimizing the center of gravity.









# BASIC STRUCTURE

DN Solutions' Compact Machining Centers with a stable structure for high productivity and excellent precision.

## High-speed and High-productivity tapping centres

The new tapping centres deliver best-in-class productivity by providing superior machining capabilities, higher feed rates, and faster tool change times. The machines have a wide appeal especially for component manufacturers serving the Automotive and IT industry segments.

## Tapping line up

	Standard	High productivity	High speed
<b>X axis</b> <b>500 mm</b> (19.7 inch)	 T 4000 <b>12000/18000 r/min</b>	 T 4000HP <b>12000 r/min</b>	 T 4000HS <b>24000 r/min</b>
<b>Acc./Deceleration</b>	0.8/0.8/1.2g	2.0/1.3/2.2g	1.6/1.3/1.5g
<b>X axis</b> <b>700 mm</b> (27.6 inch)	 T 4000L <b>12000/18000 r/min</b>	 T 4000LHP <b>12000r/min</b>	 T 4000LHS <b>24000 r/min</b>
<b>Acc./Deceleration</b>	0.6/0.6/1.2g	1.2/1.0/2.2g	0.9/0.8/1.5g
<b>Tool to Tool</b>	1.6sec	1.5sec	1.6sec


## Travel distance (X x Y x Z axis)

T 4000/HP/HS

**520 x 400 x 350 mm**  
(20.5 x 15.7 x 13.8 inch)

T 4000L/LHS/LHP

**700 x 400 x 350 mm**  
(27.6 x 15.7 x 13.8 inch)

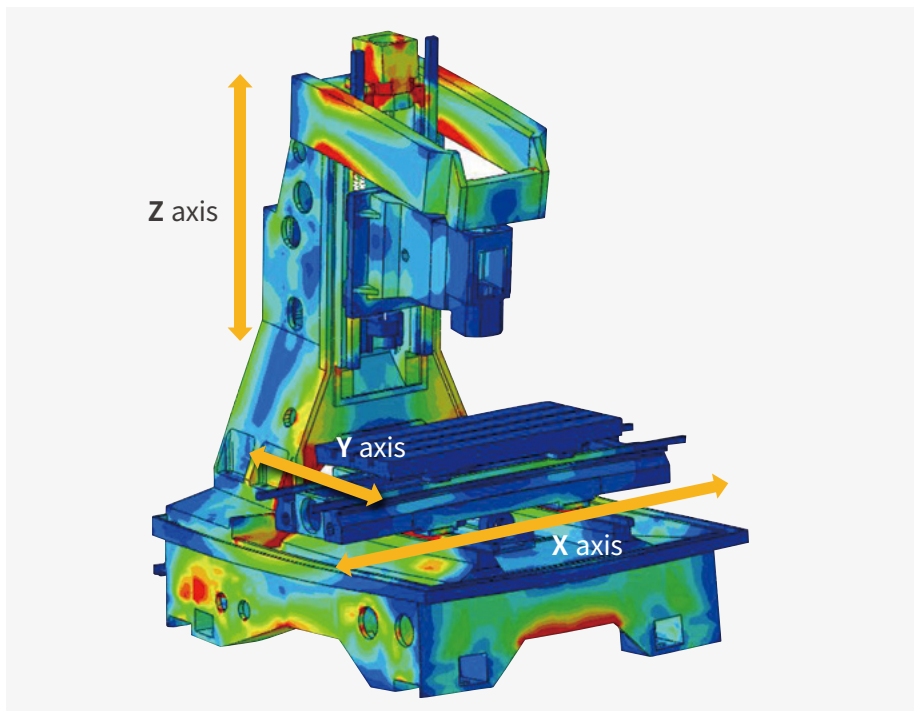

# MACHINING AREA

Increased table size and maximum load capacity improve flexibility and broaden the machines' appeal.

# FEED AXIS

High productivity is achieved by the machines' increased acceleration/deceleration rates, and the integration of roller-type LM guides, improve rigidity leading to increased accuracies.

### Table size (A x B)

T 4000/HP/HS

**650 x 400** mm  
(25.6 x 15.7 inch)

T 4000L/LHS/LHP

**850 x 400** mm  
(33.5 x 15.7 inch)


### Max weight on table

T 4000/L/HP/LHS/LHP

**300** kg  
(661.4 lb)

T 4000HS/LHS

**200** kg  
(440.9 lb)

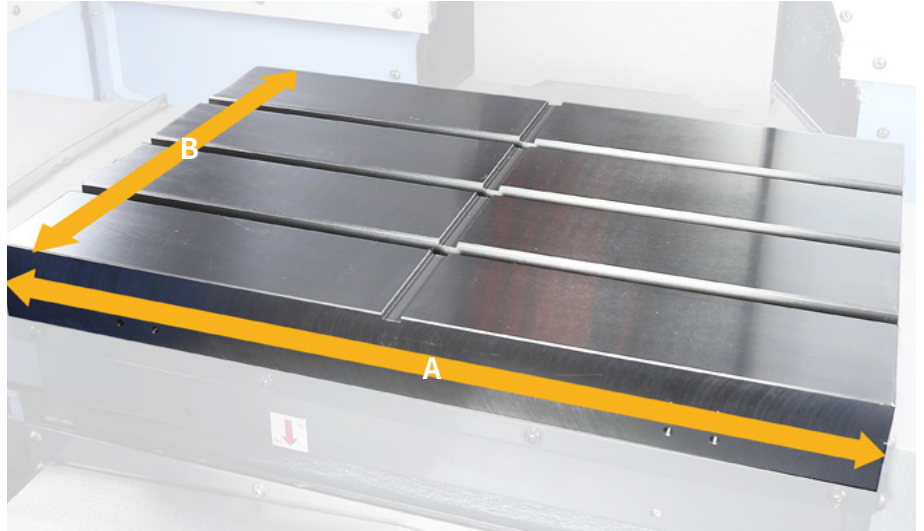


### Rapid traverse rate (X/Y/Z axis)

T 4000HS/LHS

**48/48/48** m/min  
(1889.8 / 1889.8 / 1889.8 ipm)

T 4000/L

**56/56/56** m/min  
(2204.7 / 2204.7 / 2204.7 ipm)

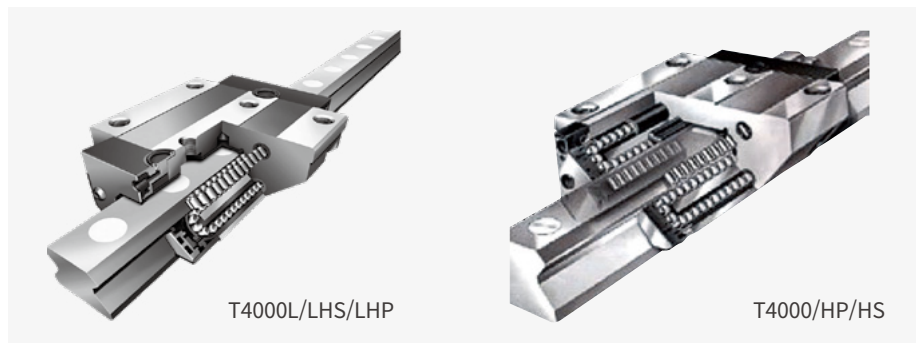


T 4000HP/LHP

## High-Productivity

Axis acceleration/deceleration time is minimized by applying an Synchronous motor.

### Rapid traverse rate (X/Y/Z axis)

**50/50/56** m/min  
(1968.5 / 1968.5 / 2204.7 ipm)

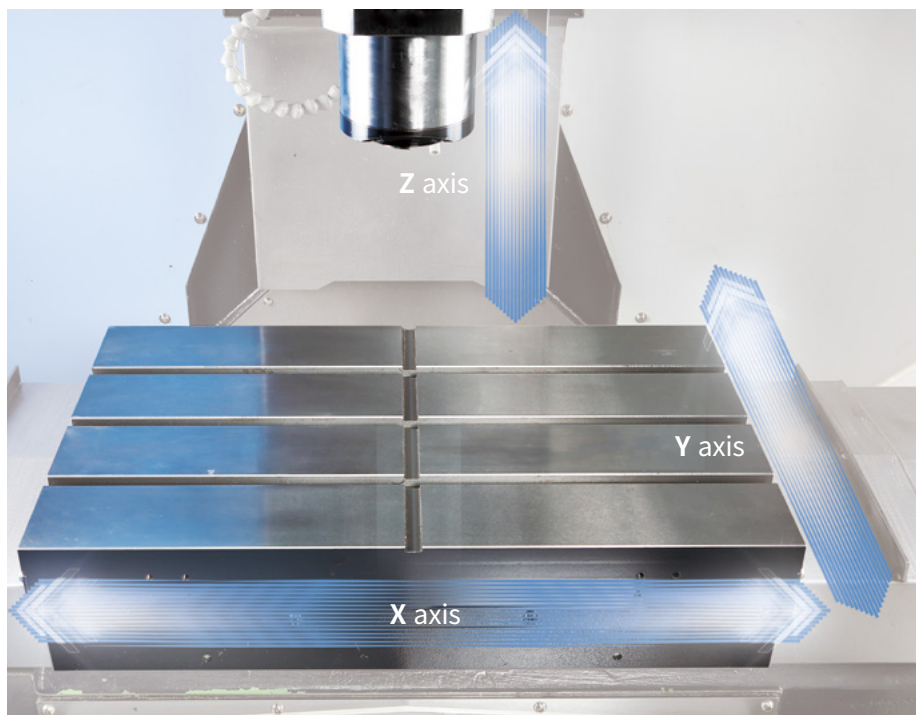

# SPINDLE

T series machines are equipped with spindle technology that delivers increased productivity, improved reliability and rapid acceleration/deceleration rates.

T 4000HP/LHP

## High-precision spindle

The spindle length has been minimized to reduce the time required for acceleration/deceleration times to be realized and to minimize idle time resulting, not only in greater productivity, but also in reduced vibration and noise generation.

## High-productivity spindle

A synchronous motor integrated with the spindle enables fast acceleration and deceleration rates to be achieved and non-cutting time reduced.

Max spindle speed

**12000** r/min



T 4000HS/LHS

## High-Precision, High-Speed spindle

The high speed, high precision spindle has achieved a proven level of durability during many applied survival test procedures. The oil/air lubrication method is applied to the spindle bearings which satisfies the requirements for high speed machining over long periods.

Max spindle speed

**24000** r/min




T 4000/L

**12000{18000}** r/min

## Spindle Thermal Error Compensation System(Standard)

Thermal displacement is calculated in real time by temperature sensors and automatically compensated for to ensure accuracy.

- T 4000HP/LHP : 12K Sensor type thermal error compensation system
- T4000/L : 12K Sensorless type
- T 4000/L : 18K Sensor type thermal error compensation system
- T4000HS/LHS : 24K Sensor type thermal error compensation system

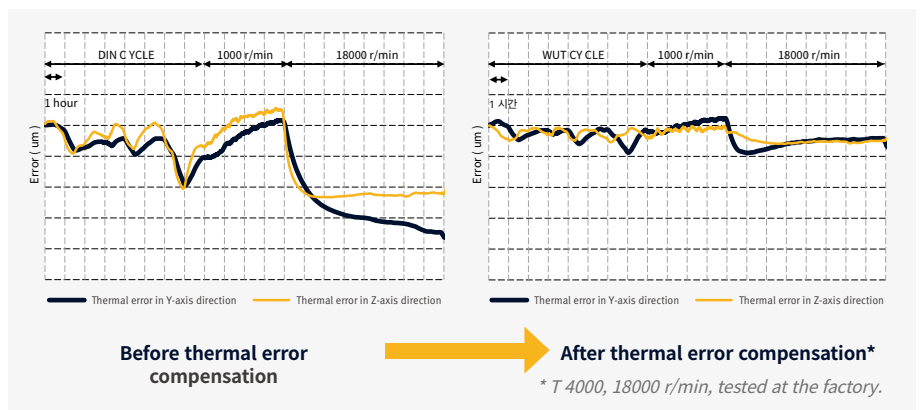

# MAGAZINE

Machine reliability has been optimized with the new servo tool magazine, while productivity has been enhanced by reducing the tool change time.

## Tool Magazine

The servo-driven control system used in the magazine has passed the 2 Million cycle test mark, proving its excellent reliability and durability.

### Tool storage capacity

T 4000/L/HP/HS

**21** ea

### Tool to Tool

T 4000/HS/L

**1.6** sec

T 4000HP/LHP

**1.5** sec

### Chip to Chip

T 4000/HS/L

**2.6** sec


T 4000HP/LHP

**2.2** sec

*\* The Chip to Chip time was tested in accordance with DN Solutions's strict testing conditions, but may vary depending on the user's operating conditions.*

	Specifications	Max tool diameter (mm (inch))	
		Continuous	Adjacent pots empty
T 4000HP/LHP	21 tools	80 (3.1)	150 (5.9)
T 4000/L			
T 4000HS/LHS			

	Max tool length (mm (inch))	Max tool weight (kg (lb))
T 4000HP/LHP	240 (9.4)	2.8 (6.2)
T 4000/L		
T 4000HS/LHS		

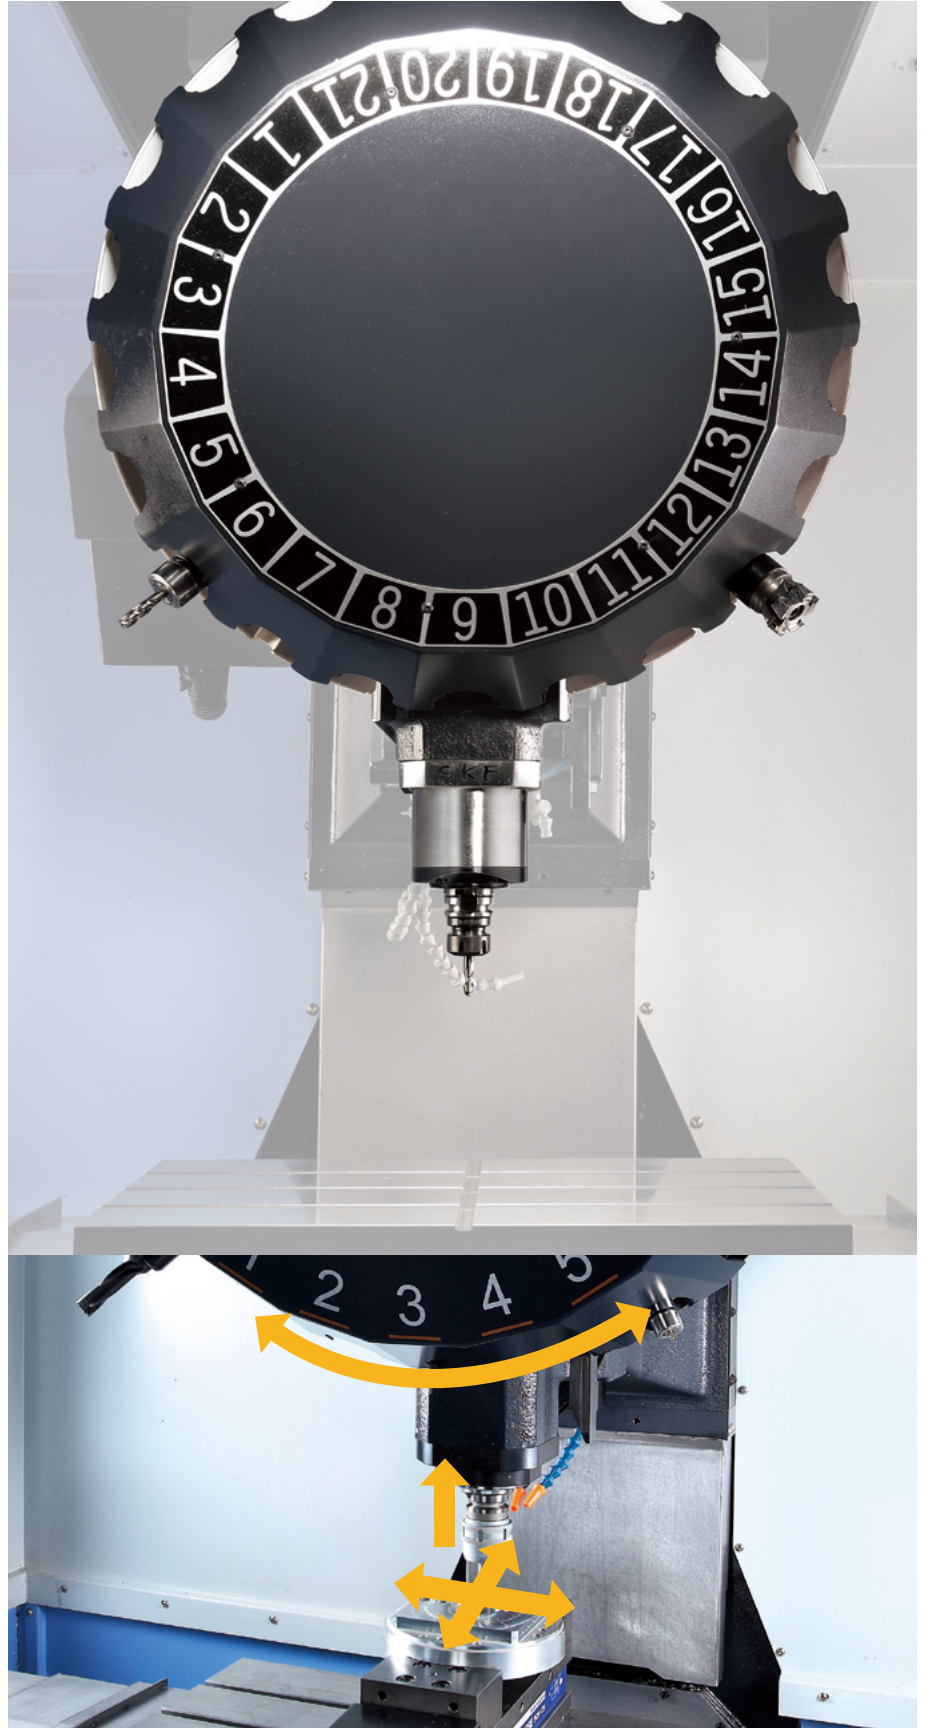

# PRODUCTIVITY PERFORMANCE

T4000HP uses synchronous motors and is up to 17% more productive than competitors. The newly-designed, directly-coupled spindle delivers greater productivity combined with excellent reliability and rapid acceleration/deceleration rates.

## High productivity

Spindle power and torque have been increased enabling new T series machines to undertake a range of machining operations in diverse cutting conditions.

### Improved spindle motor performance

Item		T 4000 (F-0IMF_12K)	T 4000HP(FANUC_12K)
Spindle	kW (Hp)	13(17.4)	36(48.3)
	N·m (ft·lbs)	82.7(61.0)	43(31.7)


### T4000HP Acceleration/Deceleration (10K)

T4000HP	FANUC
Acceleration	0.15
Deceleration	0.166


### Cycle Time



- Automotive parts
- Material : Aluminum

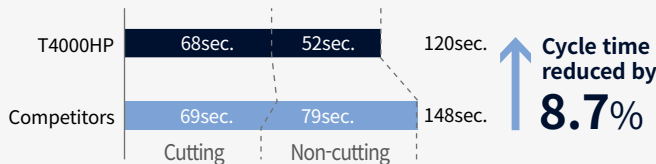

- IT parts

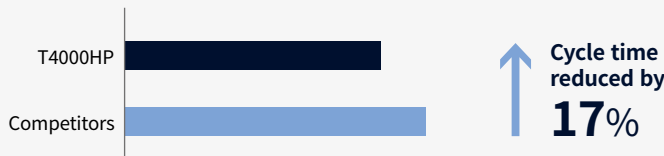

\* Please contact DN Solutions representative for detailed productivity information.

## Variable workload control

Instructing M-code equivalent to the weight of the work automatically selects a table transfer pattern appropriate for the weight to be processed.

## AICC (Fanuc)

Higher cutting speeds and feeds can be used and exploited, safely and securely. Corner rounding and overshoot issues are avoided due to good block look-ahead capability resulting in more accurate profiling.

# STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Specifications	T4000HP/LHP	T4000HS/LHS	T4000/L	
Spindle	12000 r/min	●	X	●	
	18000 r/min	X	X	○	
	24000 r/min	X	●	X	
Coolant	Flood (Tank capacity/ Pump motor power)	200 L/0.4 kW	●	●	●
	Flushing (Tank capacity/ Pump motor power)	200 L/ 1.1 kW	●	●	●
	TSC middle (Tank capacity/ Pump motor power)	200 L/1.5 kW	○	○	○
	TSC middle 2 (Tank capacity/ Pump motor power)	200 L/4.0 kW.	○	○	○
	Coolant gun (Tank capacity/ Pump motor power)	200 L/0.6 kW	○	○	○
	Water soluble Coolant Chiller**		○	○	○
LCD size	10.4 inch(FANUC)	●	●	●	
Tool shank type	Big plus BT30	●	●	●	
Tool magazine	Armless type(21 tool)	●	●	●	
	CAM TYPE(20/24TOOL)	○	○	○	
HYDRAULIC fixture interface	A/B line_1 pair	○	○	○	
	A/B line_2 pair	○	○	○	
Oil skimmer	Belt type	○	○	○	
Air	Air blower	○	○	○	
	Air gun	○	○	○	
	Spindle air curtain	●	●	●	
Chip conveyor	Chip pan	●	●	●	
	Hinged type	○	○	○	
	Magnetic scraper type	○	○	○	
Chip bucket	Forklift or rotation	○	○	○	
Automatic front door	Automatic front door	○	○	○	
Mist collector		○	○	○	
M achine cover type	Top cover	●	●	●	
Auto tool length measuring device	TS27R_RENISHAW	○	○	○	
Auto tool damage detection device	OMRON / D5A	○	○	○	
	Schubert system elektronik GmbH / BK97(Needle type in cutting area)	○	○	○	
Data server	Data server (* FANUC optional)	○	○	○	
Auto power cut-off		○	○	○	
Test bar	Test bar guage	○	○	○	
Signal tower	System condition indicator	●	●	●	
Smart thermal control	12000 r/min	●	X	●	
	18000 r/min	X	X	●	
	24000 r/min	X	●	X	
Customized Special Option	Raising block	150 mm	○	○	○
		200 mm	○	○	○
		300 mm	○	○	○
	Drum chipconveyor	Scraper type	○	○	○
	Tool washing	-	○	○	○

\* When using a semi-synthetic type or synthetic type, contact our sales representative or service center in advance.

● Standard ○ Optional X N/A

\*\* Technical consultation is mandatory for the chilling of non-water soluble coolant

\* Please contact your DN Solutions representative for detailed machine information.




**Fire Safety  
Precautions**

There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting the controlled and careful use of coolants and modifying the machine without the consent of the manufacturer. Always check the SAFETY GUIDELINES carefully before using the machine.

# PERIPHERAL EQUIPMENT

## 4-axis interface/hydraulic & pneumatic jig line

Chip conveyors are designed to improve chip disposal and help optimise machine maintenance.

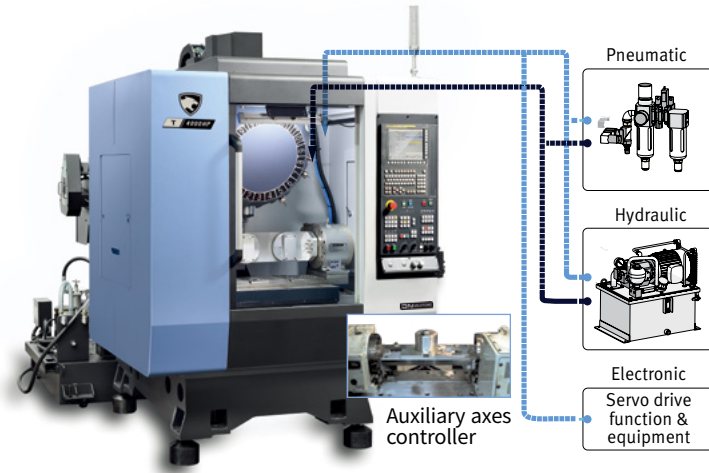


### Checklist for hydraulic/pneumatic lines for work clamping

Hydraulic/pneumatic line for jig  
 Hydraulic line  P/T  A/B  
 Pneumatic line  P/T  A/B

Hydraulic unit  
 Supplier:  End user  DN Solutions

Hydraulic unit  
 24 L/min / 4.4 MPA  
 Customer requirements  
 \_\_\_\_\_ L/min at \_\_\_\_\_ MPA

Number of jig ports  
 1pair (2-PT 1/4" port)  
 2pair (4-PT 1/4" port)




*• Please contact us for further detailed specifications.*

### Mist collector


- When installing an oil mist collector please refer to DN Solutions's recommendations.
- Installing an oil mist collector in an inappropriate place or position may affect the performance of the machine.

### 4th-axis rotary table

The compact high-precision, highlyrigid designed system enables vertical and horizontal use, and delivers a strong clamping force.




Auto Door



Chip conveyor

### Through-spindle-coolant system




Minimum quantity lubrication

### Raised column(150mm (5.9inch))



Oil skimmer





Chip box for fine chip disposal



Auto tool measurement device



Misting device



# FANUC i PLUS

DN Solutions Fanuc i Plus maximizes customer productivity and convenience.

## 10.4" Screen + New OP

DN Solutions Fanuc i Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout. It features a Qwerty keyboard for fast and easy data input and operation.

## FANUC i Plus

- 10.4 inch color display
- Intuitive and user-friendly design

## USB and PCMCIA card QWERTY keyboard

- EZ-Guide i standard
- Ergonomic operator panel
- 2MB Memory
- Hot keys



## PCMCIA Card

The PCMCIA card enables uploading and downloading of the NC program, NC parameters, tool information, ladder programs, and also supports DNC operation.

## USB Port

The USB memory stick enables uploading and downloading of the NC program, NC parameters, tool information and ladder programs. (DNC operation is not supported.)




## NUMERIC CONTROL SPECIFICATIONS

# FANUC


Division	Item	Specifications	T4000/L/HP/HS/LHS/LHP
			FANUC i Plus
Controlled axis	Controlled axes		3 (X,Y,Z)
	Simultaneously controlled axes		4 axes
	Additional controlled Axis	Add 1 Axis (5th Axis)	●
Data input/output	Fast data server		○
	Memory card input/output		●
	USB memory input/output		●
Interface function	Embedded Ethernet		●
	Fast Ethernet		○
	Enhanced Embedded Ethernet function		●
Operation	DNC operation	Included in RS232C interface.	●
	DNC operation with memory card		●
Program input	Workpiece coordinate system	G52 - G59	●
	Addition of workpiece coordinate system	G54.1 P1 X 48 (48 pairs)	○
	Tool number command		T2 digits
Feed function	Tilted working plane indexing command	G68.2 TWP	X
	AI contour control I	G5.1 Q_, 40 Blocks	X
	AI contour control II	G5.1 Q_, 200 Blocks	●
	AI contour control II	G5.1 Q_, 600 Blocks	○
	AI contour control II	G5.1 Q_, 1000 Blocks	X
Operation Guidance Function	High smooth TCP		X
	EZ Guidei (Conversational Programming Solution)		○
	iHMI with Machining Cycle	Note *1) Only with 15" Touch LCD standard	X
Setting and display	EZ Operation package		●
	CNC screen dual display function		●
Network	FANUC MTConnect		●
	FANUC OPC UA		●
Others	Display unit	10.4" color LCD	●
		15" color LCD	X
		15" color LCD with Touch Panel	X
		640M(256KB)_500 programs	X
		1280M(512KB)_1000 programs	X
		2560M(1MB)_1000 programs	X
		5120M(2MB)_1000 programs	●
		10240M(4MB)_1000 programs	X
		20480M(8MB)_1000 programs	X
		2560M(1MB)_2000 programs	X
		5120M(2MB)_4000 programs	X
10240M(4MB)_4000 programs	X		
20480M(8MB)_4000 programs	X		

# POWER | TORQUE


## DN Solutions FANUC i PLUS\_T 4000/L

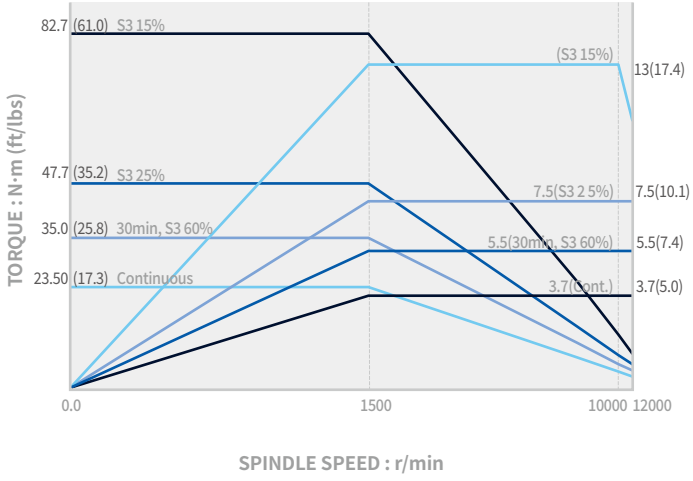


## DN Solutions FANUC i PLUS\_T 4000/L OPTION

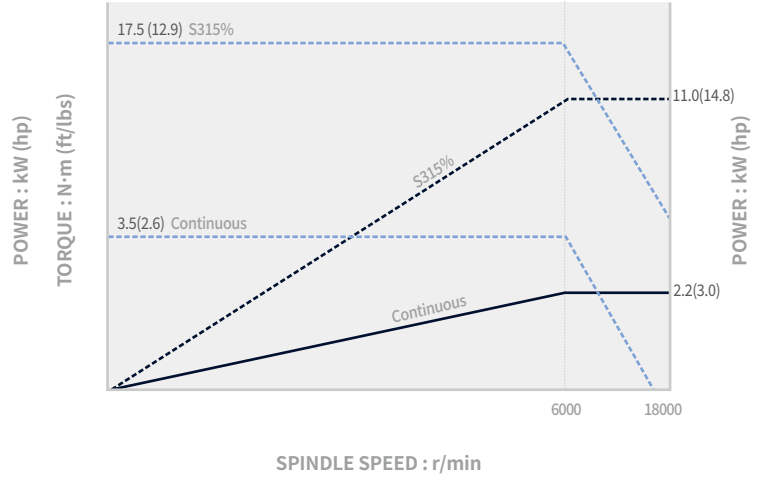

## DN Solutions FANUC i PLUS\_T4000HP/LHP

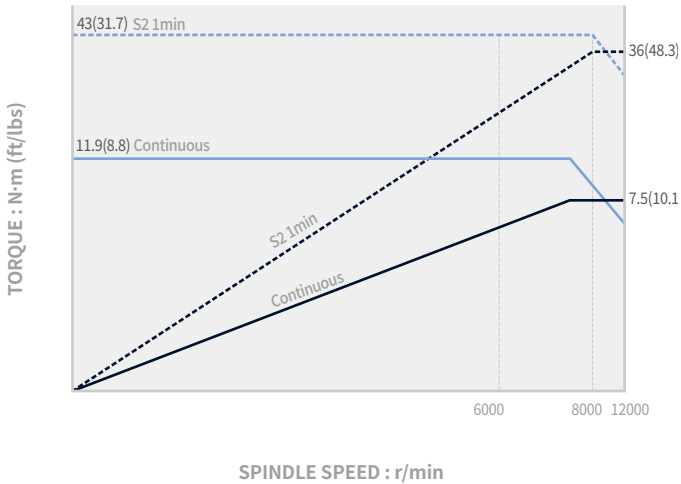

## DN Solutions FANUC i PLUS\_T4000HS/LHS

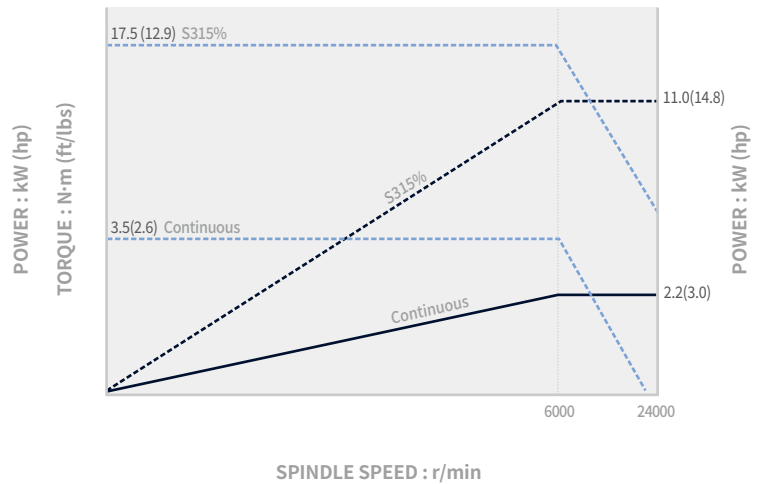


# EXTERNAL DIMENSIONS


## T 4000HP/HS

TOP


Unit : mm (inch)

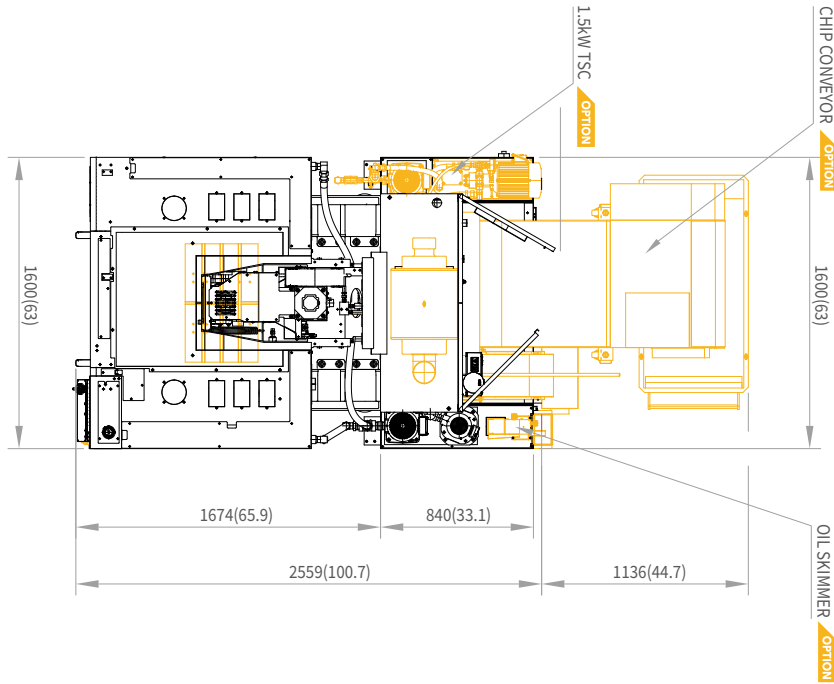

FRONT

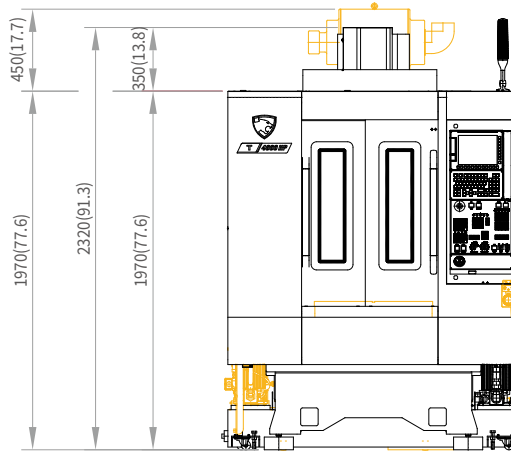

SIDE

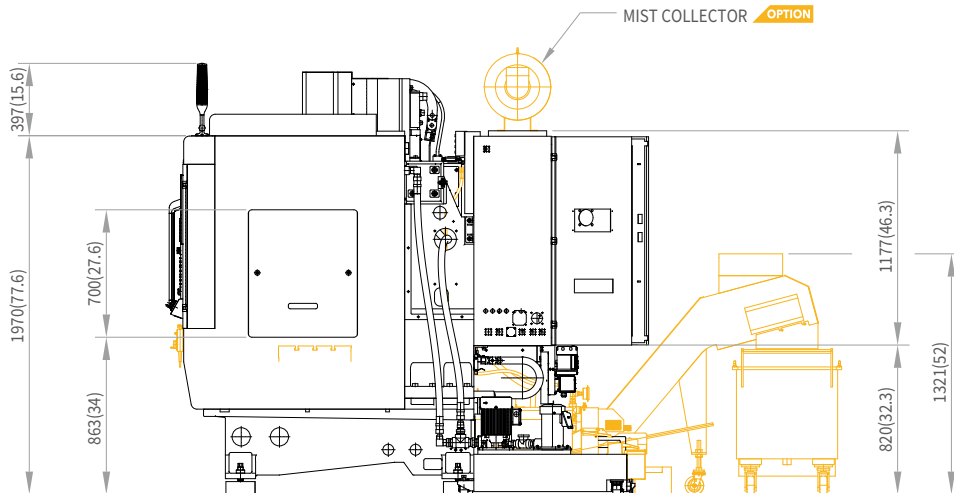


\* Some peripheral equipment can be placed in other areas.

# EXTERNAL DIMENSIONS


## T 4000

TOP


Unit : mm (inch)

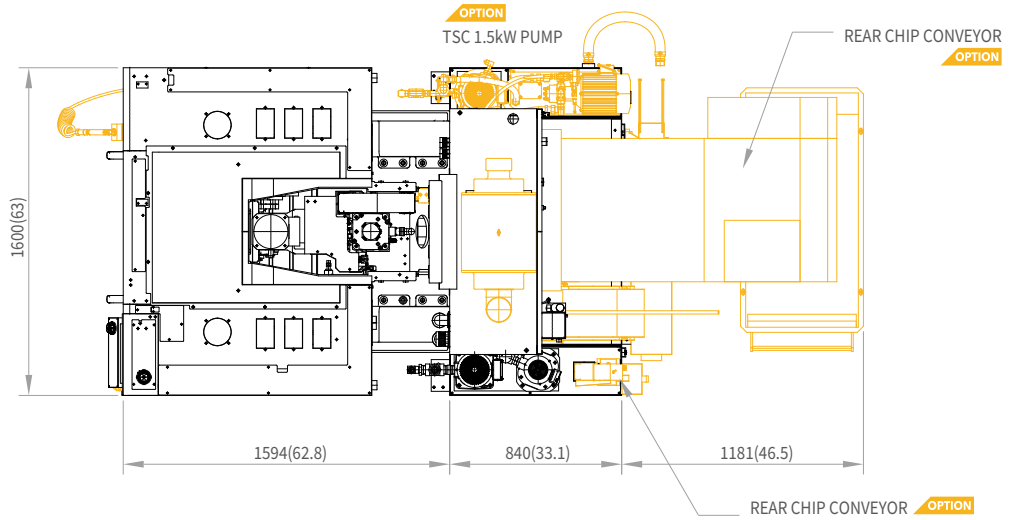

FRONT

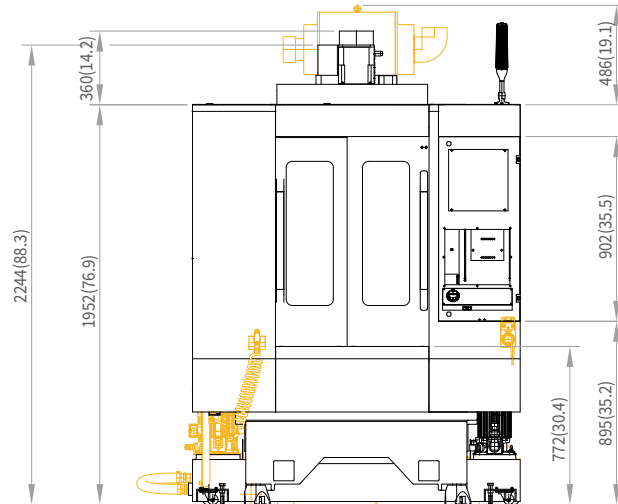

SIDE

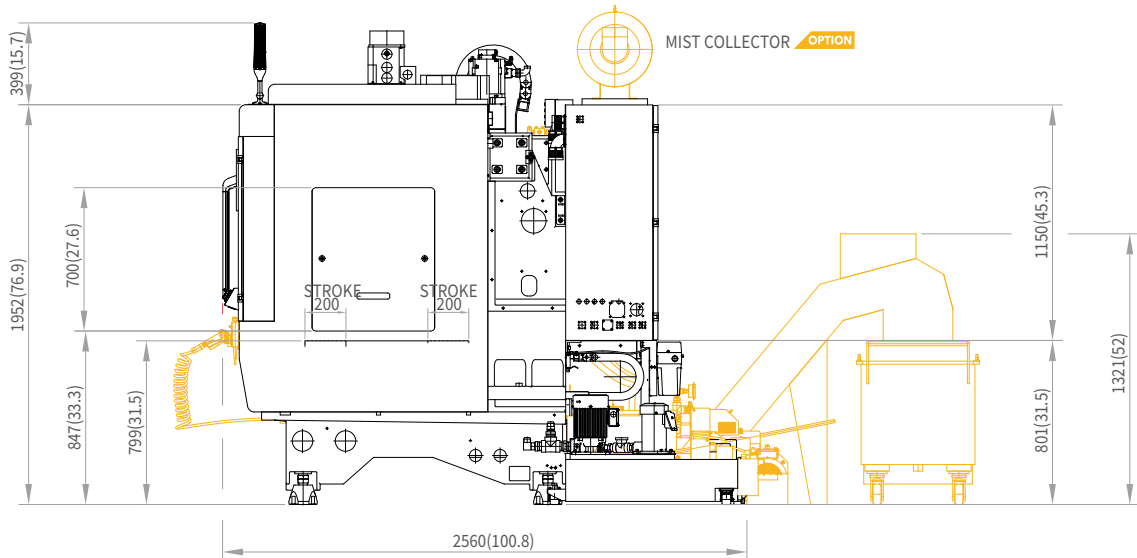


# EXTERNAL DIMENSIONS


## T 4000L

TOP


Unit : mm (inch)

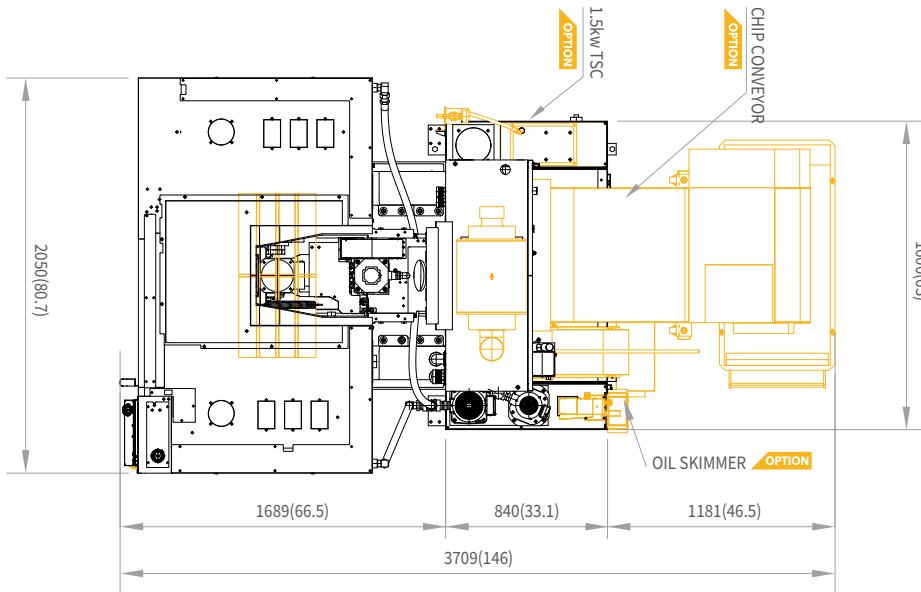

FRONT

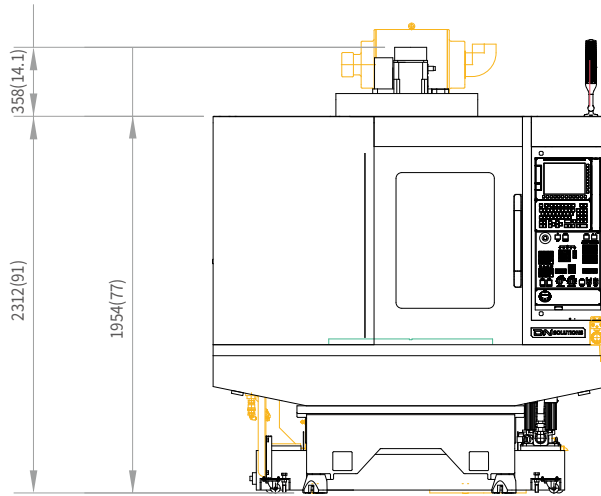

SIDE

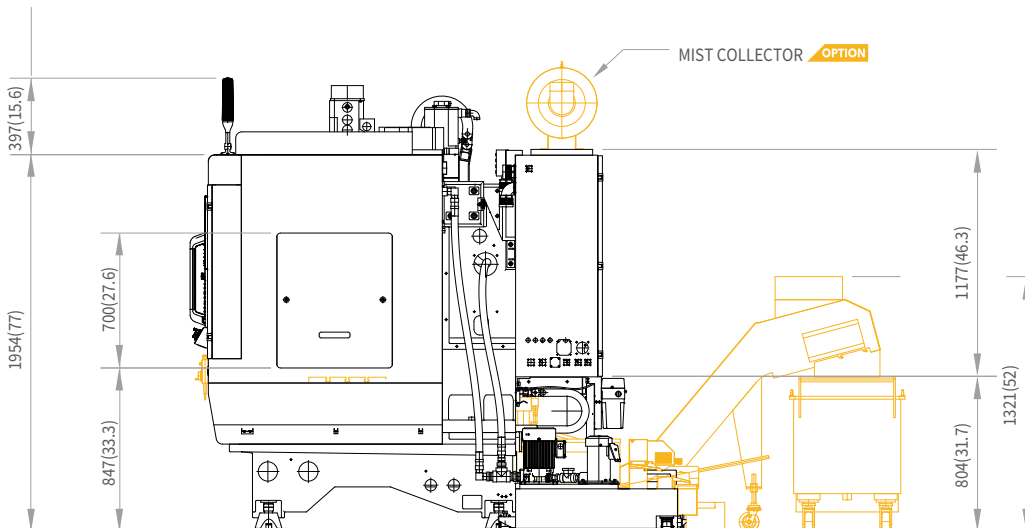


\* Some peripheral equipment can be placed in other areas.

# EXTERNAL DIMENSIONS


## T 4000LHS/LHP

TOP


Unit : mm (inch)

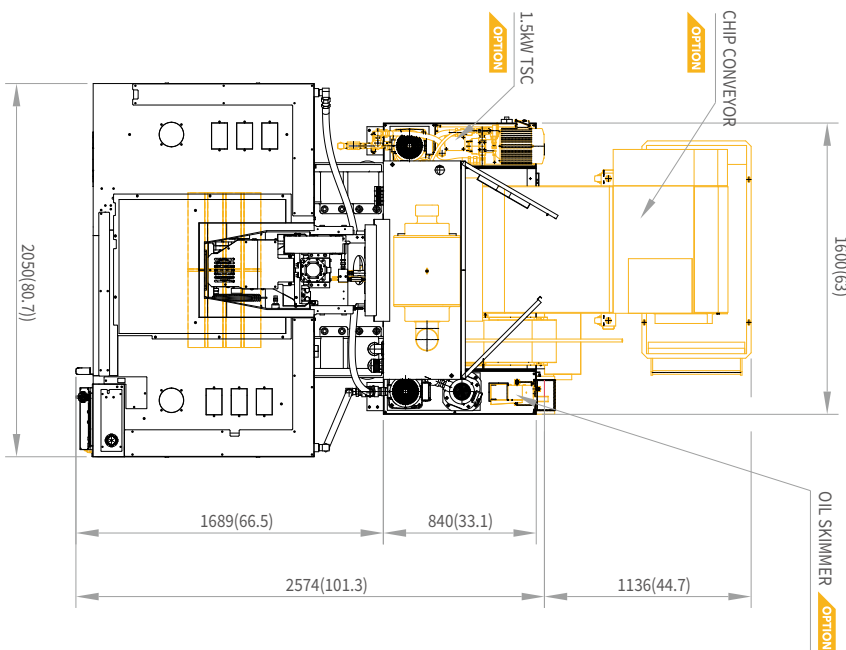

FRONT

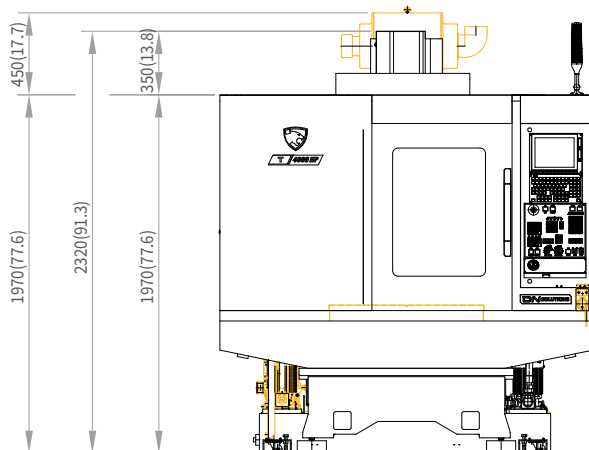


SIDE

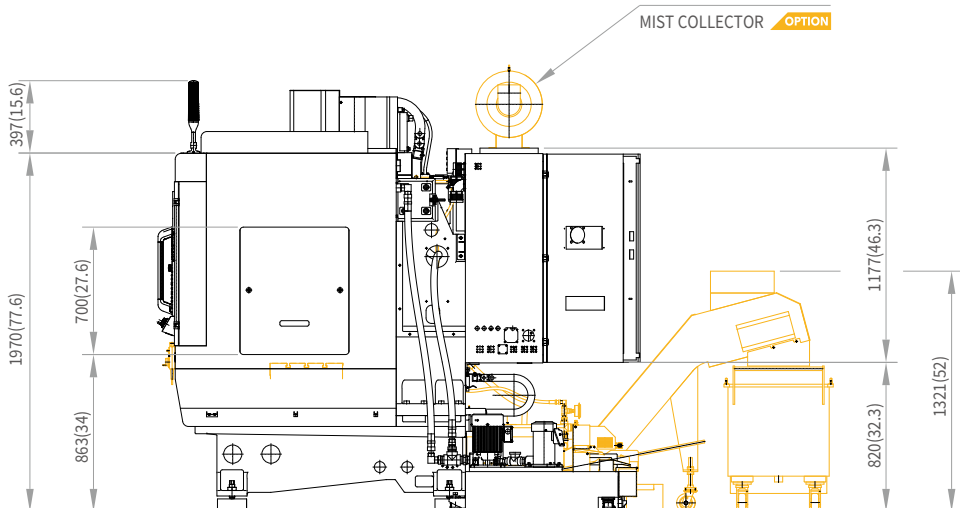



# TABLE

Unit : mm (inch)


## T 4000/HP/HS

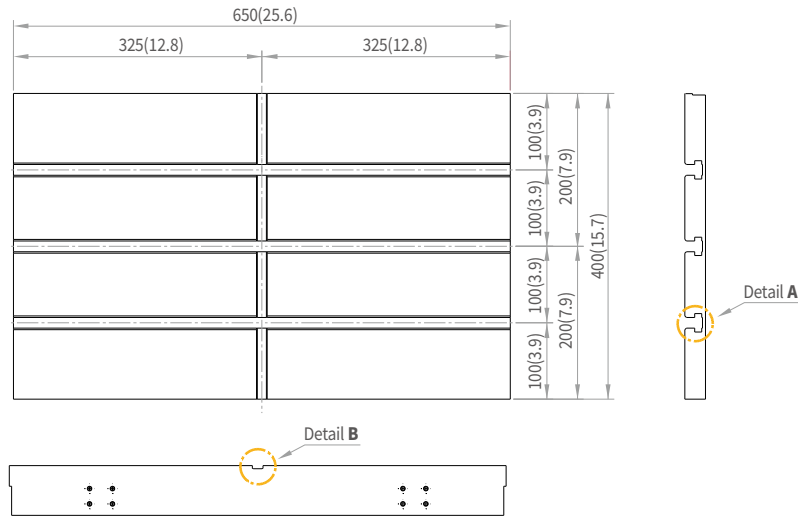

## T 4000L/LHS/LHP

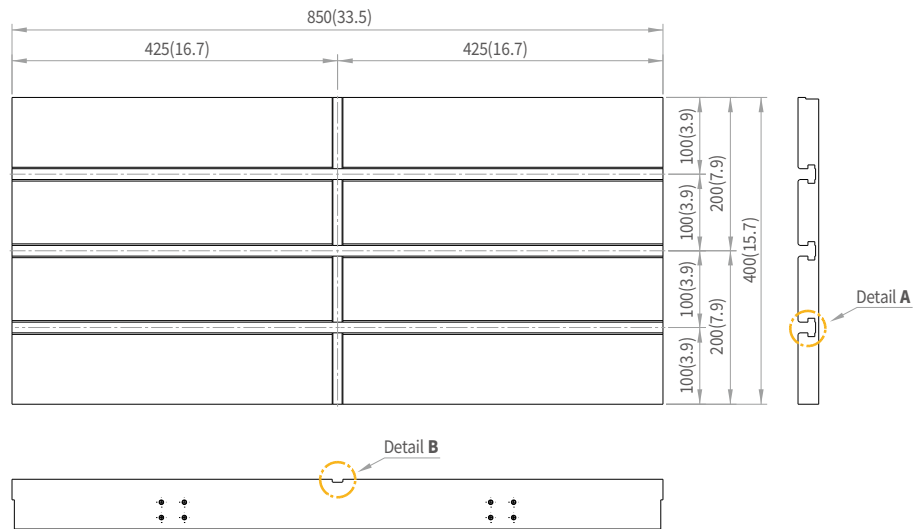

Detail A



Detail B

# MACHINE SPECIFICATIONS

Item			Unit	T 4000HP/LHP	T 4000HS/LHS	T4000/L	
				F0i-F Plus	F0i-F Plus	F0i-F Plus	
Travel	Travel distance	X-axis	mm (inch)	520 {700} (20.5 {27.6})			
		Y-axis	mm (inch)	400 (15.7)			
		Z-axis	mm (inch)	350 (13.8)			
	Distance from spindle center to table top		mm (inch)	150 (5.9) - 500 (19.7)			
Feed rate	Rapid Transfer Rate	X-axis	m/min (ipm)	50 (1968.5)	48 (1889.8)	56 (2204.7)	
		Y-axis	m/min (ipm)	50 (1968.5)	48 (1889.8)	56 (2204.7)	
		Z-axis	m/min (ipm)	56 (2204.7)	48 (1889.8)	56 (2204.7)	
	Max. cutting feedrate		m/min (ipm)	25 (984.3)	24 (944.9)	28 (1102.4)	
Table	Table size		mm (inch)	650 X 400 (25.6 X 15.7) {850 X 400 (33.5 X 15.7)}			
	Loading capacity		kg (lb)	300 (661.4)	200 {300} (440.9 {661.4})	300 (661.4)	
	Table type			T-SLOT(3-100X14H8)			
Spindle	Max. spindle speed		r/min	12000	24000	12000 {18000}	
	Max. spindle torque		N.m (ft-lbs)	43 (31.7)	17.5 (12.9)	18.8 (13.9) {31.8 (23.5)}	82.7 (61.0) {17.5 (12.9)}
	Spindle motor power		kW (Hp)	36 / 7.5 (48.3 / 10.1)	11 / 2.2 (14.8 / 3.0)	5.5/3.7 (7.4 / 5.0) {5.5/3.7 (7.4 / 5.0)}	13 / 3.7 (17.4 / 5.0) {11/2.2 (14.8/3.0)}
	Spindle taper			ISO #30			
ATC	Tool shank type			BT 30			
	Tool storage capacity		ea	21 {20/24}			
	Max. tool diameter	Continuous	mm (inch)	80 (3.1)			
		Near port empty	mm (inch)	150 (5.9)			
	Max. tool length		mm (inch)	240 (9.4)			
	Max. tool weight		kg (lb)	2.8 (6.2)			
	Max. tool moment		N·m (ft-lbs)	1.47 (1.1)			
	Max. magazine weight		kg (lb)	33 (72.8)			
	Max. magazine eccentric load weight		kg (lb)	21 (46.3)			
	Tool selection			Fixed address			
	Tool change time (tool to tool)		s	1.5	1.6		
Tool change time (chip-to-chip)		s	2.2	2.6			
Coolant Pump	Coolant pump motor power		kW (Hp)	Flood : 0.4 Flushing : 1.1			
Power source	Electric power		kVA	27.8	19 {16.46}	17.95 {17.95}	19.79 {16.46}
	Air pressure		MPa	0.54			
Dimensions	Height		mm (inch)	2312 (91.0)			
	Length		mm (inch)	2560 {2575} (100.8 {101.4})			
	Width		mm (inch)	1633 {2050} (64.2 {80.7})			
	Weight		kg (lb)	3000 {3200} (118.1{7054.7})		2800 {3000} (110.2 {118.1})	

# RESPONDING TO CUSTOMERS **ANYTIME, ANYWHERE**

## DN SOLUTIONS GLOBAL NETWORK

**66** COUNTRIES | **140** + SALES NETWORKS | **3** FACTORIES | **6** REGIONAL HQS



## CUSTOMER SUPPORT AND SERVICES

### WE'RE THERE FOR YOU WHENEVER YOU NEED US.

We help our customers operate at maximum efficiency by providing them with a range of tried, tested and trusted services - from pre-sales consultancy to post-sales support.



#### FIELD SERVICES

- On-site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair service



#### PARTS SUPPLY

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service



#### TRAINING

- Programming, machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



#### TECHNICAL SUPPORT

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy

**Head Office**

19F, 10, Tongil-ro, Jung-gu, Seoul,  
Republic of Korea, 04527

Tel: +82-2-6972-0370  
Fax: +82-2-6972-0400

**DN Solutions America**

360 E State PKWY,  
Schaumburg, IL. 60173,  
United states

Tel: +1-315-265-7500

**DN Solutions Europe**

Emdener Strasse 24, D-41540  
Dormagen, Germany

Tel: +49-2133-5067-100  
Fax: +49-2133-5067-111

**DN Solutions India**

No.82, Jakkur Village  
Yelahanka Hobli,  
Bangalore-560064

Tel: +91-80-2205-6900  
E-mail: [india@dncompany.com](mailto:india@dncompany.com)

**DN Solutions China**

Room 101,201,301,  
Building 39 Xinzhuan Highway  
No.258 Songjiang District  
China Shanghai (201612)

Tel: +86 21-5445-1155  
Fax: +86 21-6405-1472

**DN Solutions Vietnam**

M.O.R.E building 2F, 40A-40B Ut  
Tich Street, 04 Ward 04,  
District Tan Binh District,  
Ho Chi Minh City, Vietnam

Tel: +84 28-7304-0163

**DN Solutions Mexico**

Avenida Parque Bicentenario  
#100 Nave M65L3-6,  
Fraccionamiento San Isidro  
Business Park,  
Santa Rosa Jauregui,  
Querétaro, México

E-mail: [efrain.figueroa@dncompany.com](mailto:efrain.figueroa@dncompany.com)

**Sales inquiry**

[sales@dncompany.com](mailto:sales@dncompany.com)